


MODEL 22HPM

- Wirewound
- Bushingmount
- Low-cost Item
- RoHS Compliant

● Standard Dimensions



Model 22HPM-10

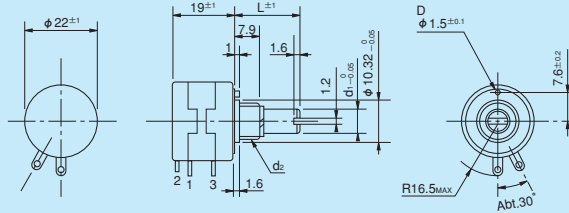

Model No.	Shaft Dimensions		Mounting Screw	Anti-rotation
	d1	L	d2	D
22HPM-10	φ6	20.6	3/8-32UNEF	Yes
22HPM-10M	φ6	25.0	M9 P=0.75	Yes
22HPM-10E	φ6.35	20.6	3/8-32UNEF	Yes
22HPM-10N	φ6	20.6	M9 P=0.75	Yes

- Note: 1. 1 set of inner teeth washer & hex nut is attached.
 2. Outer dimension of 5-turn version is the same as those of 10-turn.
 3. Housing length of 2 ganged version is extended by 19mm.
 4. Please process the mounting hole on the panel. The diameter should be $10.32\text{mm}^{+0.05}_0$.

● Standard Model Numbers

5-turn models	22HPM-5 22HPM-5M 22HPM-5E 22HPM-5N
10-turn models	22HPM-10 22HPM-10M 22HPM-10E 22HPM-10N

Note: Please select the exact model number from the right-side table, because each model number has different shaft dia. and bushing dimensions.

● General Specifications

Standard Resistance Range	100,200,500,1k,2k,5k,10k,20k Ω (5-turn) 100,200,500,1k,2k,5k,10k,20k,50k Ω (10-turn)
Max. Practical Resistance Value	50k Ω (5-turn) 100k Ω (10-turn)
Total Resistance Tolerance	Standard Class ±5% (J) Precision Class ±1% (F)
Independent Linearity Tolerance	5-turn
	10-turn
Power Rating	Standard Class ±0.3% $\geq 5\text{K-}\Omega \pm 0.15\%$ Precision Class ±0.2% $< 5\text{K-}\Omega \pm 0.25\%$ (Within 5k Ω (±0.25%) (±0.15%))
	1.0W (5-turn) 2.0W (10-turn)
Noise	Within 100 Ω E.N.R.
Electrical Travel	$360^\circ \times n \pm 5^\circ$ (n: No. of turns)
Mechanical Travel	$360^\circ \times \frac{+10^\circ}{n} \frac{-0^\circ}{0}$ (n: No. of turns)
Insulation Resistance	Over 1,000M Ω at 500V.D.C.
Dielectric Strength	1 minute at 1,000V.A.C.

Starting Torque	Within 10mN · m (100gf · cm)
Stopper Strength	Approx. 0.35N · m (3.5kgf · cm)
Appropriate fastening torque of the nut	Within 1.0N · m (10kgf · cm) (In the case of panel thickness with over 2.5mm, the rotating torque may become heavier.)
Resistance Temperature Coefficient	±20p.p.m./°C
Materials	Shaft Stainless steel Housing case Glass-filled nylon Bushing Metal Brass Terminals Gold-plated brass (All terminals can be fitted with the Tyco 110 series faston receptacle (2.8× 0.5mm) or equivalents.)
Mass	Approx. 20g (Both 5-turn and 10-turn)

● Standard Resistance Values ■ No. of Wire Turns ■ Resistance Wire Used

Resist. Value (Ω)	100	200	500	1k	2k	5k	10k	20k	50k	100k
22HP-5	1,240	1,560	2,000	2,510	2,400	3,200	3,900	4,800	※ 5,500	—
22HP-10	2,100	2,480	3,300	4,000	5,020	5,000	6,400	7,800	10,100	※ 11,000
Resist. Wire Used	Cu-Ni					Ni-Cr				

Note: Mark ※ shows special high resistance value.

● Special Specifications Available

(In the case of the potentiometer with special specifications, the general specifications and environmental specifications may change. Please consult us in advance.)

- Shaft with front and rear extension (Rear shaft with 6mm dia. and 15mm length)
- Multi-ganged (Available up to 10 gangs)
- With high torque
- Special shaft dia. (φ 3mm, φ 3.175mm, φ 4mm, φ 5mm)
- Special machining on the shaft
- 1, 2, 3, 4, 6, 7 and 8-turn versions are available (These versions have the same dimensions.)
- Simple sealed housing
- Slipping-clutch incorporated type (20mN·m ~ 60mN·m)
- Extra tap (Available up to 1 tap only for 10-turn model)
- Servomount type (Same dimensions as 22HPS-10)